




## PK;Pulse Killer; Pulstors, High Voltage (Vp), Fastest Pulsing Energy

3RLAB offers the 'Pulstor' series to meet high frequency PULSING powers; applications short width but high voltage high energy controlling , pulse energy on the skin-effect at high frequency, various range of resistive value.



DIMENSIONS [mm]

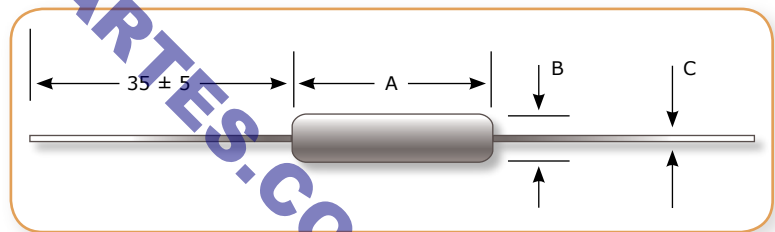


Model Nr.	Power (W)	Resistance [ ohm ] Min. Max.	Dimensions in millimeters						SMD type
			A	B (dia)	C	pins * spacing (center to center)	pins* width (center to center)	pin size	
PK2	2	1R 2M	24.0+/-1.0	8.0+/-1.5	1.0 x 2wire Axial	N/A	N/A	N/A	available
PK3	3.5	3R 2M	39.0+/-1.0	8.0+/-1.5	1.0 x 2wire Axial	N/A	N/A	N/A	available
PK5	5	5R 2M	52.0+/-1.0	8.0+/-1.0	1.0 x 2wire Axial	N/A	N/A	N/A	available
PK10	10	1.5R 2M	42.0+/-1.5	18.0+/-1.0	N/A	11.5+/-0.2	49.3+/-0.3	0.3 x 2.5	**
PK15	15	2.5R 2M	60.0+/-1.5	18.0+/-1.0	N/A	11.5+/-0.2	49.3+/-0.3	0.3 x 2.5	**

\*\* If necessary SMD , then the user able to bend 4 terminals in semi-flexible which made for the soldering pads

\* pins made of brass , on semi-flexible status , adjustable pins width



**DERATING CURVE**

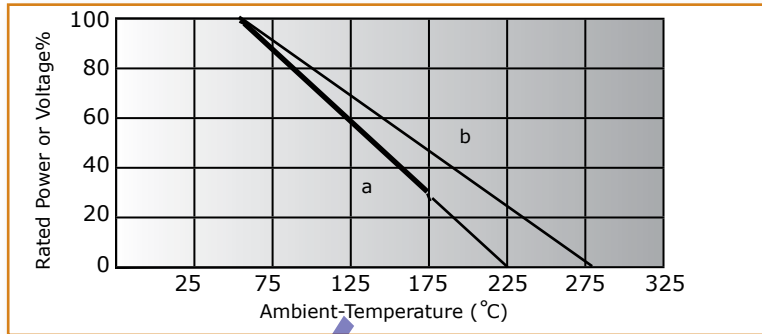

cf. a ; epoxy conformal coat b; glass coat

**SPECIFICATIONS**

**Resistance Tolerance :**

10% Typ, 2%, 5% available

**Temperature Coefficient :**

Std. 100ppm/°C typ., referenced to 25°C, from -15°C to +105°C, other TCR available upon requests.

**Thermal Shock :**

Mil-Std-202F, Method107 Cond. C, dR 2.0% typ.

**Load Life :**

1.000 hours at rated Pulse power dR 5.0%

**Repetive High Voltage Impulsing :**

10,000cycles 1sec on 1sec off dR 2.0%

**Moisture Resistance :**

Mil-Std-202, Method 106, dR 1.0% typ.

**Lead Material :**

PK2 PK3 PK5 ; dia 1mm tinned copper wire  
PK10 PK15 ; Ni plated brass 4 terminals in radial

**Insulation Resistance :**

10,000Megohms Min.

**Termination Cap of Material :**

Tinned Cap / Ni plated brass cap

**Encapsulation :**

High temp. epoxy conformal / Silicone conformal / Glass coat

Model Nr.	1) Voltage		Max Single-Pulse Energy [J] *	2) Voltage at 22kΩ~2MΩ	
	applicable R-Value[Ω]	Repetive Pulse [kVp]		Max. Continuous Voltage [kVp]	1.2/50µs single pulse
PK2	1 ~ 20K	1.5	300	3.5	7
PK3	3 ~ 20K	2.0	500	7	14
PK5	5 ~ 20K	2.5	950	10	20
PK10	1.5 ~ 20K	3	1500	8	15
PK15	2.5 ~ 20K	3.5	2500	12	22

+ Custom R-Value on Request.

++ high voltage energy products vulnerable by a lot of factors , so would better use small q'ty as an order first and get test results, place main order

• Pulse width shall be less than 10 µs at 1R ~ 20kΩ ,and less than 10ms at 22kΩ~2MΩ

1) less than 10 µs pulse width, limited by allowable power rating

2) continous pulsing or dc , ac, they are limited by allowable power rating

cf.: The described specifications & dimensions subject to change without notice.



#604 Hyundai I-Valley ,14-1 Dang-dong , Kunpo City, Kyunggido, Korea

voice +82-31-429-6379 fax +82-31-429-9127

resistors@3rlab.com www.3RLab.com

2007©3RLab,Inc.

designed by jonaldo , France